




BUTT-WELDING MACHINE

MODEL VWT 180 GL

SPECIFICATIONS

Butt-welding machine with heater for pipes of tubing and mouldings made of polyethylene with outside diameters (OD) between 50-180 mm. At rated pressure (PN) between 3.2 and PN 16

- **The machine body** has a dual clamping device with quick-action lock, guide by two hydraulic cylinders, on the fixed and on the mobile side. Two flexible hoses with quick-action coupling connect the appliance to the hydraulic control unit. The dual clamping devices are screwed to the tubular-steel base. Dimension 35x35x60 cm. Weight: approx. 23 kg.
 - **The electrically operated hydraulic control unit** which moves the right dual clamping device and precisely controls the jointing force, has a pressure-holding device for the cooling-down phase an adjustable timer, and two rapid-action couplings Dimension 30x30x60 cm. Weight: approx. 32 kg.
 - **The face cutter** (220V/700W) is attached to the guide shafts. It is electrically powered by a chain drive protected by an all-enclosing aluminium case and automatically delivers chips to the outside. Weight: approx. 7.5 kg.
 - **The teflon-coated integrated heater** (220V/1200W), which is attached to the guides shafts, is digital PT100-controlled, With one output signal for LDU and an extension cable with earthing-contact plug. Weight: approx. 6 kg.
 - **For operating with small dimension**, the following clamping inserts, consisting of eight half shells per dimension are available: 50,63,75,90,110,125,140,160 mm. Weight: approx. 29 kg.
 - **To safely put down the hot heater and for attaching the face cutter**, an insulated case is available. Weight: approx. 4.5 kg.
 - **The stubend holder** Weight: approx. 2 kg.
- Weight of the machine body with all accessories: approx. 104 kg.

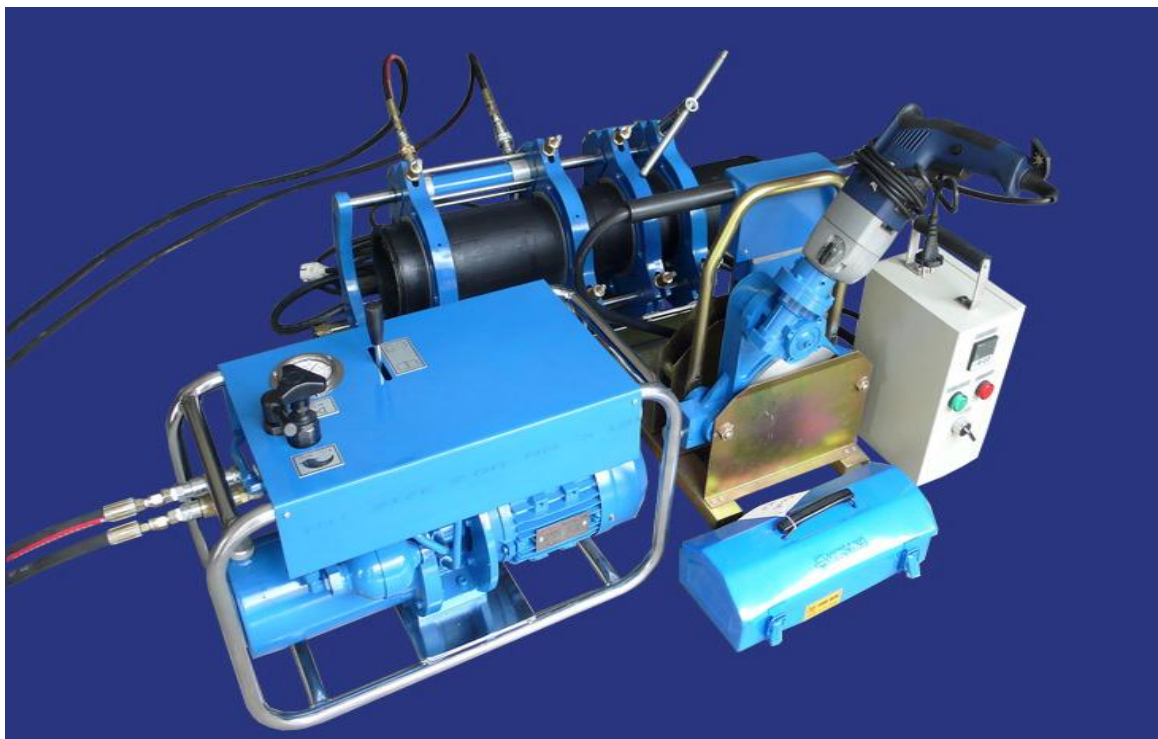

VB WELDING TECHNOLOGY CO.,LTD.

1128/19-20 PRACHARAJ SAI 1 ROAD
KWAENG BANGSUE , KHEIT BANGSUE
BANGKOK 10800. THAILAND

TEL: (+662) 556-1295-7 FAX: (+662) 556-1298